





MODEL	RATED TORQUE @ STD. AIR GAP	BREAKAWAY TORQUE	MAX RPM
MTD-0.2	.11 Nm	1 Lb-in	42,500*

* BALANCING FOR HIGH SPEED APPLICATIONS REQUIRED

REVISIONS			
REV.	ECN.	DESCRIPTION	DATE

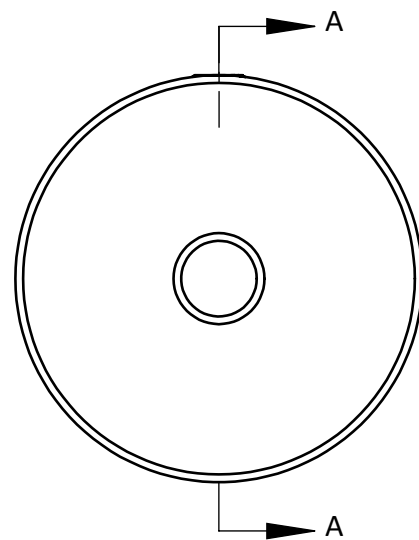

COUPLING HALF:
WEIGHT: 0.11 Lbs (0.05 Kg)

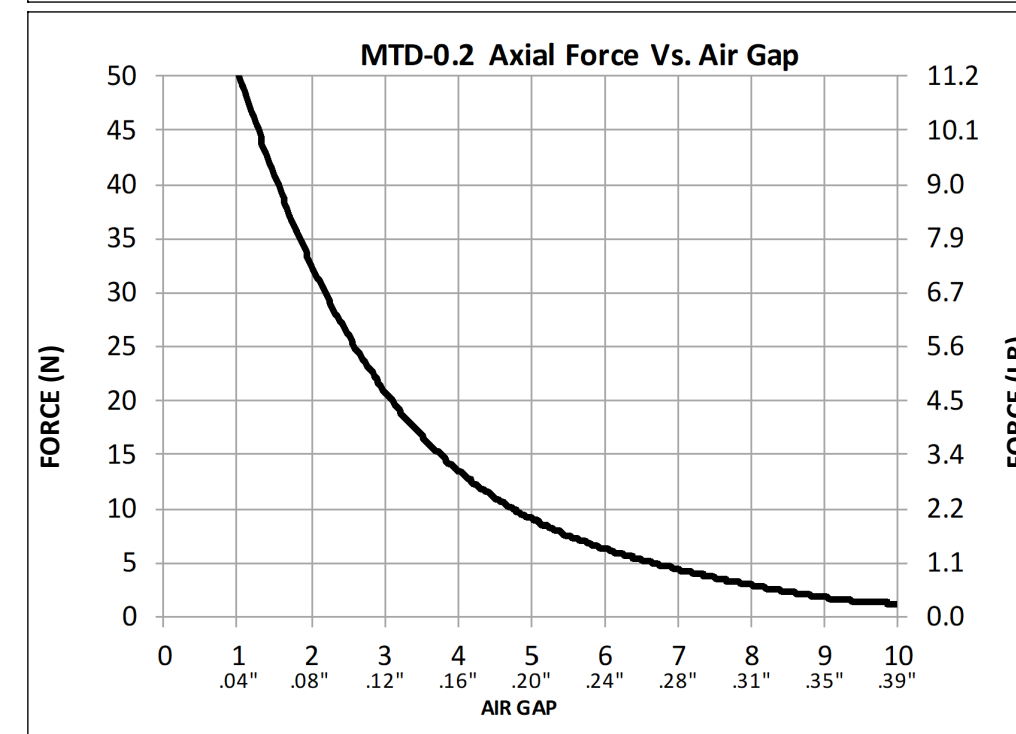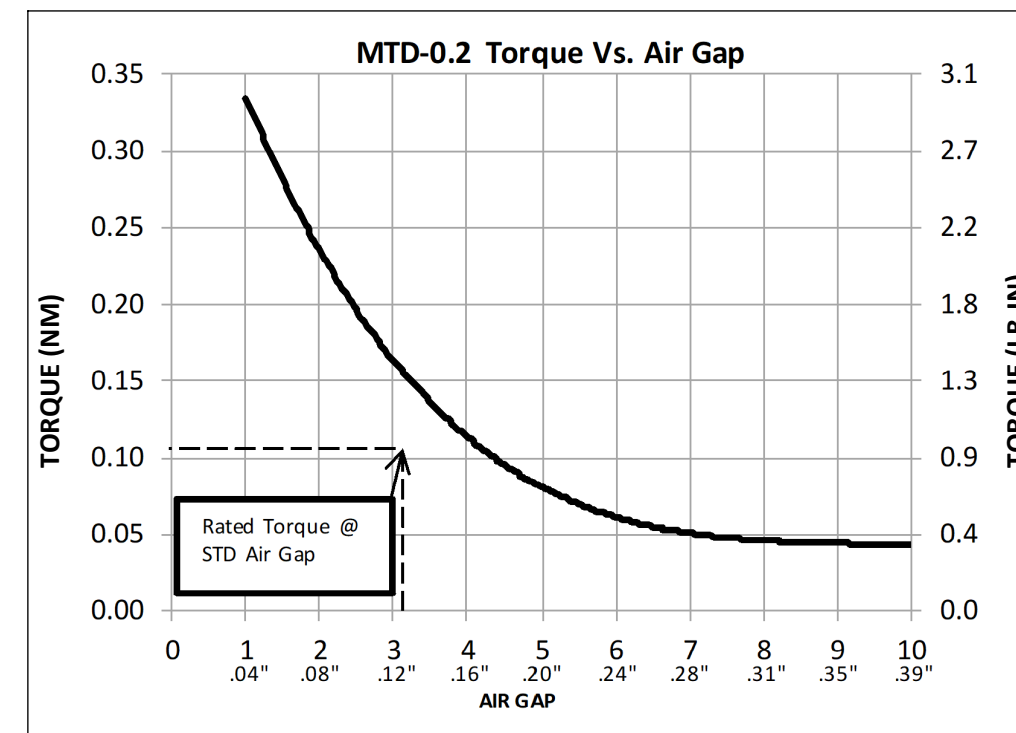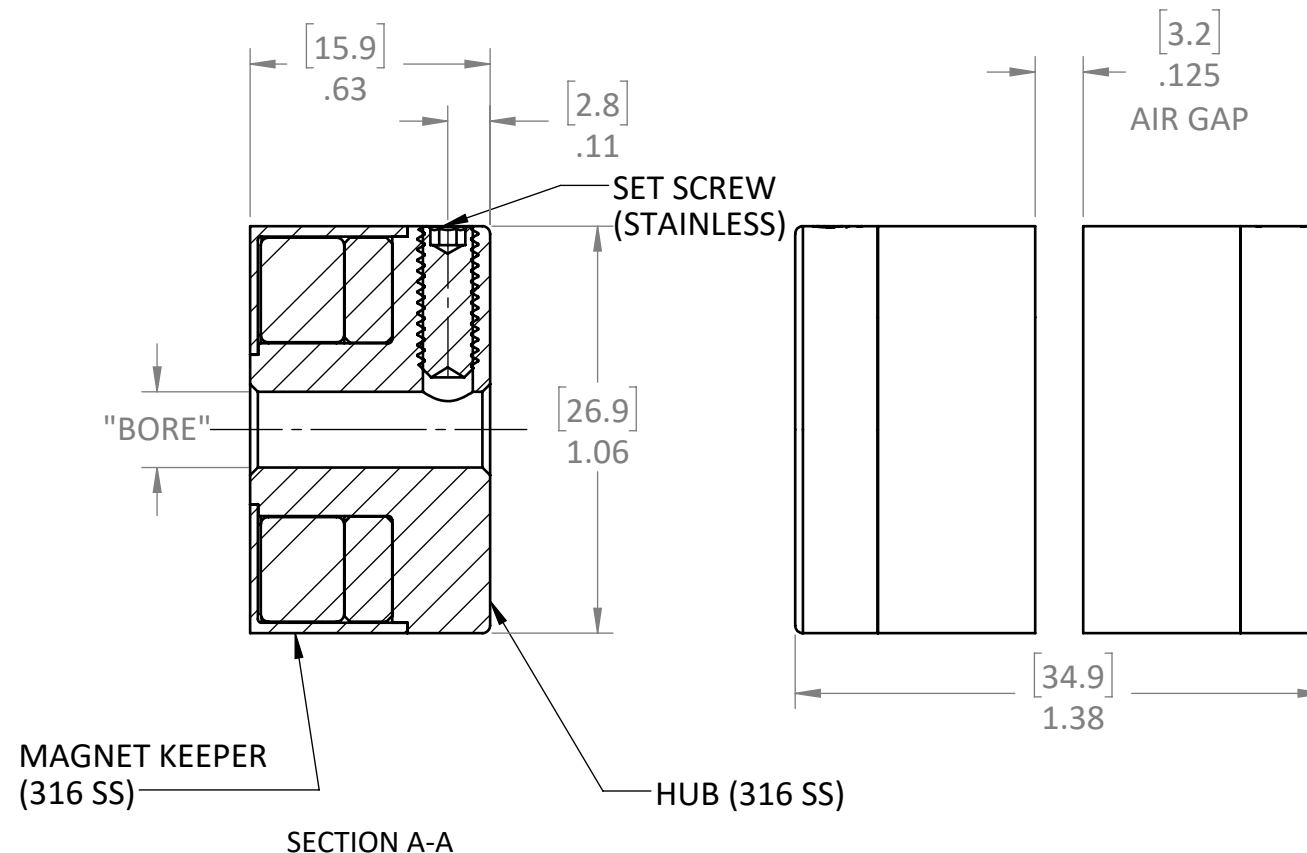

MODEL	BORE		SET SCREW
	mm ^{H8}	in ^{+0.001}	CUP POINT
MTD-0.2-006	3.00	.118	M3-0.5 x 6mm
MTD-0.2-026	3.18	.125	#6-32 x 3/8
MTD-0.2-014	4.76	.188	#8-32 x 3/8
MTD-0.2-023	5.00	.197	M4-0.7 x 10mm
MTD-0.2-024	8.00	.315	M4-0.7 x 8mm

OTHER SIZES AVAILABLE; SPECIFY BORE

USED ON MTD-0.2	SCALE 2:1	MATERIAL SEE PRT DWG	<p>43 TOWN FOREST ROAD OXFORD, MA 01540</p>
UNLESS OTHERWISE SPECIFIED:		FINISH SEE PRT DWG	
ALL DIMENSIONS ARE IN INCHES TOLERANCES: DECIMAL: .XX ± .01 .XXX ± .005 ANGULAR: ± 1° GEN. CONCENTRICITY: .001 T.I.R. MACH. FILLETS: .010 R MACH. EDGES: .015 R OR CHMF. UNSPECIFIED RADII: .015 R IN MICROINCHES RMS 32 GEOMETRIC: TO MIL-ST'D. 8 REMOVE ALL BURRS & SHARP EDGES			DRAWN ASM 9/1/2022 CHECKED
DESCRIPTION		SIZE: B	MTD-0.2 (316) Cut Sheet DWG. NO. _____ REV. _____ MTD-0.2-XXX (316)