




MODEL	RATED TORQUE @ STD. AIR GAP		BREAKAWAY TORQUE		MAX RPM
MTD-0.6	.68 Nm	6 Lb-in	.90 Nm	8 Lb-in	23,000*

* BALANCING FOR HIGH SPEED APPLICATIONS REQUIRED

REVISIONS			
REV.	ECN.	DESCRIPTION	DATE

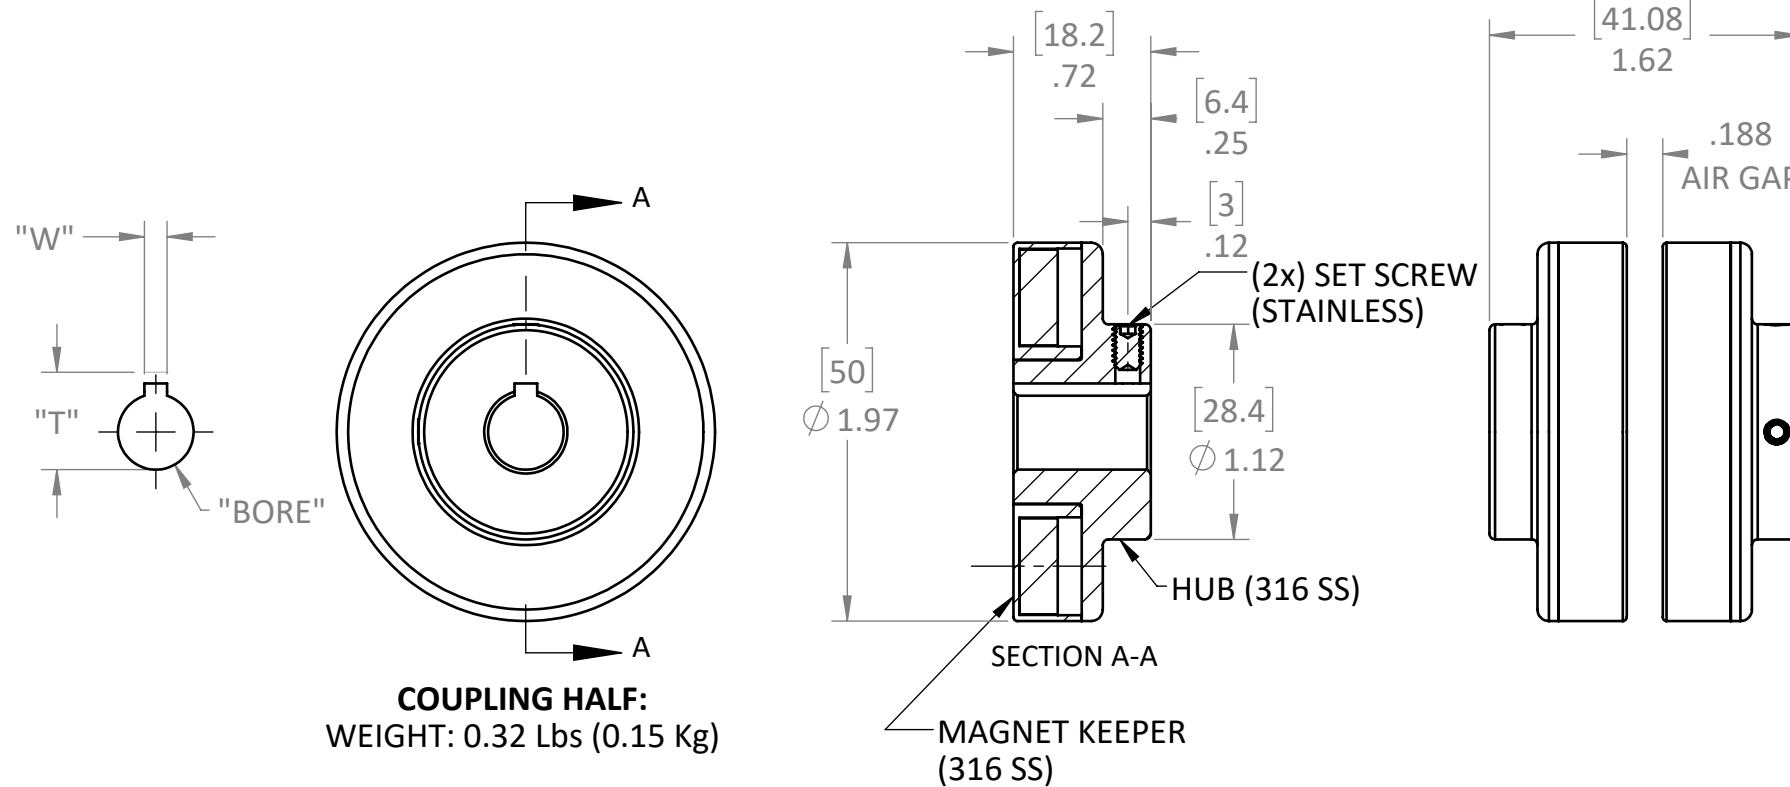

COUPLING HALF:
WEIGHT: 0.32 Lbs (0.15 Kg)

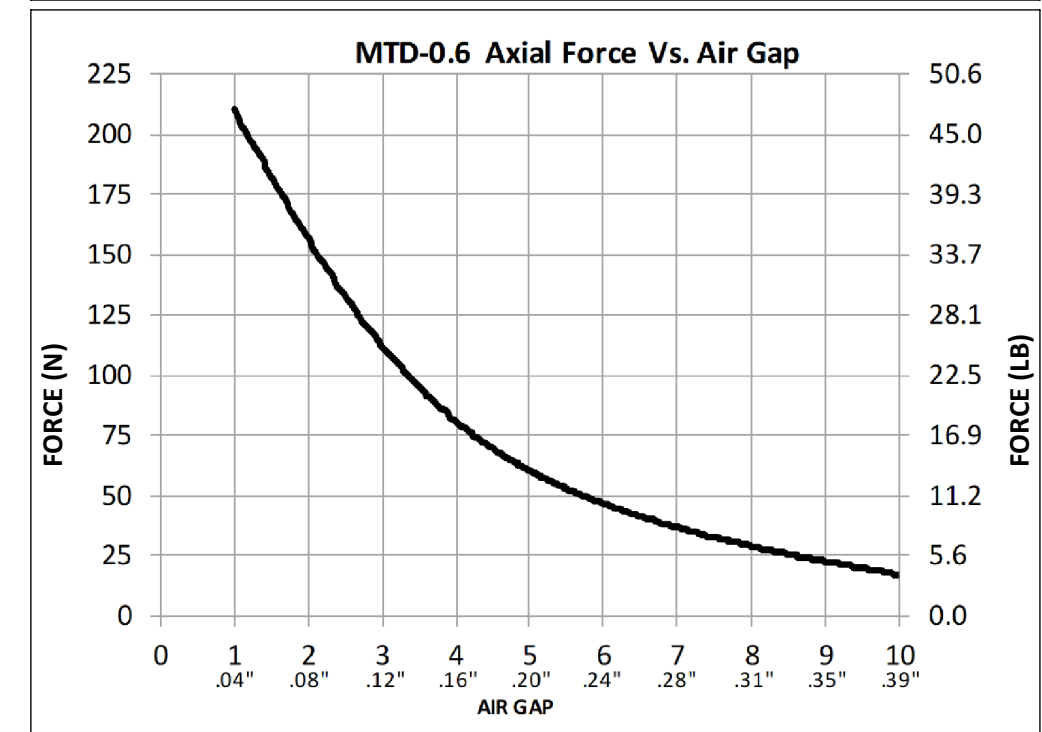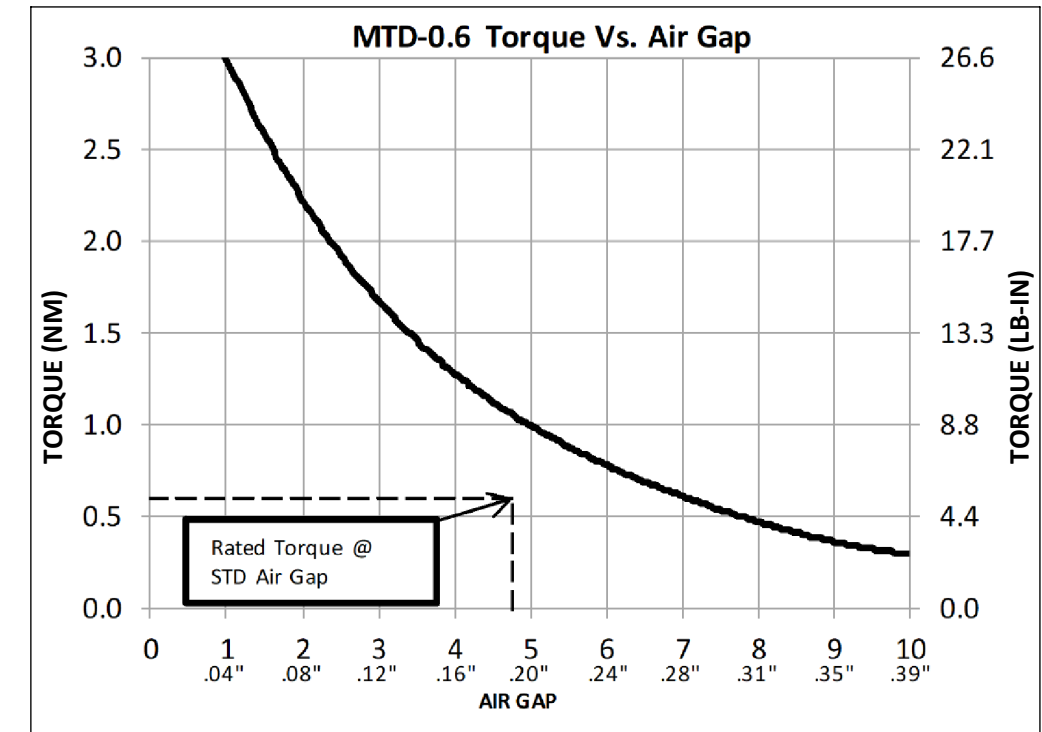

MODEL	BORE		W		T		SET SCREW (2x)
	mm ^{H8}	in ^{+0.001}	mm ^{+0.05}	in ^{+0.002}	mm ^{+0.25}	in ^{+0.010}	
MTD-0.6-025	5.00	.1969	-	-	-	-	M4-0.7 x 8mm
MTD-0.6-026	6.35	.250	-	-	-	-	#10-32 x 5/16
MTD-0.6-027	7.94	.3125	-	-	-	-	#10-32 x 5/16
MTD-0.6-016	10.00	.3937	-	-	-	-	M5-0.8 x 8mm
MTD-0.6-019	12.00	.4724	4.00	.158	13.80	.543	M4-0.7 x 6mm
MTD-0.6-024	12.7	.500	3.18	.125	14.22	.560	#10-32 x 5/16

OTHER SIZES AVAILABLE; SPECIFY BOTH BORE AND KEYWAY

THIS DRAWING IS THE PROPERTY OF MAGNETIC TECHNOLOGIES LTD. AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT SHALL NOT BE LENT, COPIED, REPRODUCED NO DISCLOSED TO ANY OTHER PERSON, IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF MAGNETIC TECHNOLOGIES LTD.

USED ON MTD-0.6	SCALE 2:1	MATERIAL SEE PRT DWG	MAGNETIC TECHNOLOGIES LTD. 43 TOWN FOREST ROAD OXFORD, MA 01540
UNLESS OTHERWISE SPECIFIED:		FINISH SEE PRT DWG	
ALL DIMENSIONS ARE IN INCHES TOLERANCES: DECIMAL: .XX ± .01 .XXX ± .005 ANGULAR: ± 1° GEN. CONCENTRICITY: .001 T.I.R. MACH. FILLETS: .010 R MACH. EDGES: .015 R OR CHMF. UNSPECIFIED RADII: .015 R IN MICROINCHES RMS 32 GEOMETRIC: TO MIL-ST'D. 8 REMOVE ALL BURRS & SHARP EDGES			DRAWN ASM 9/7/2022
			CHECKED
			DESCRIPTION MTD-0.6 (316) Cut Sheet
			DWG. NO. _____ REV. _____
SIZE: B			MTD-0.6-XXX (316)