




MODEL	RATED TORQUE @ STD. AIR GAP		BREAKAWAY TORQUE		MAX RPM
MTD-2	1.7 Nm	15 Lb-in	2.3 Nm	20 Lb-in	15,500*

* BALANCING FOR HIGH SPEED APPLICATIONS REQUIRED

REVISIONS			
REV.	ECN.	DESCRIPTION	DATE

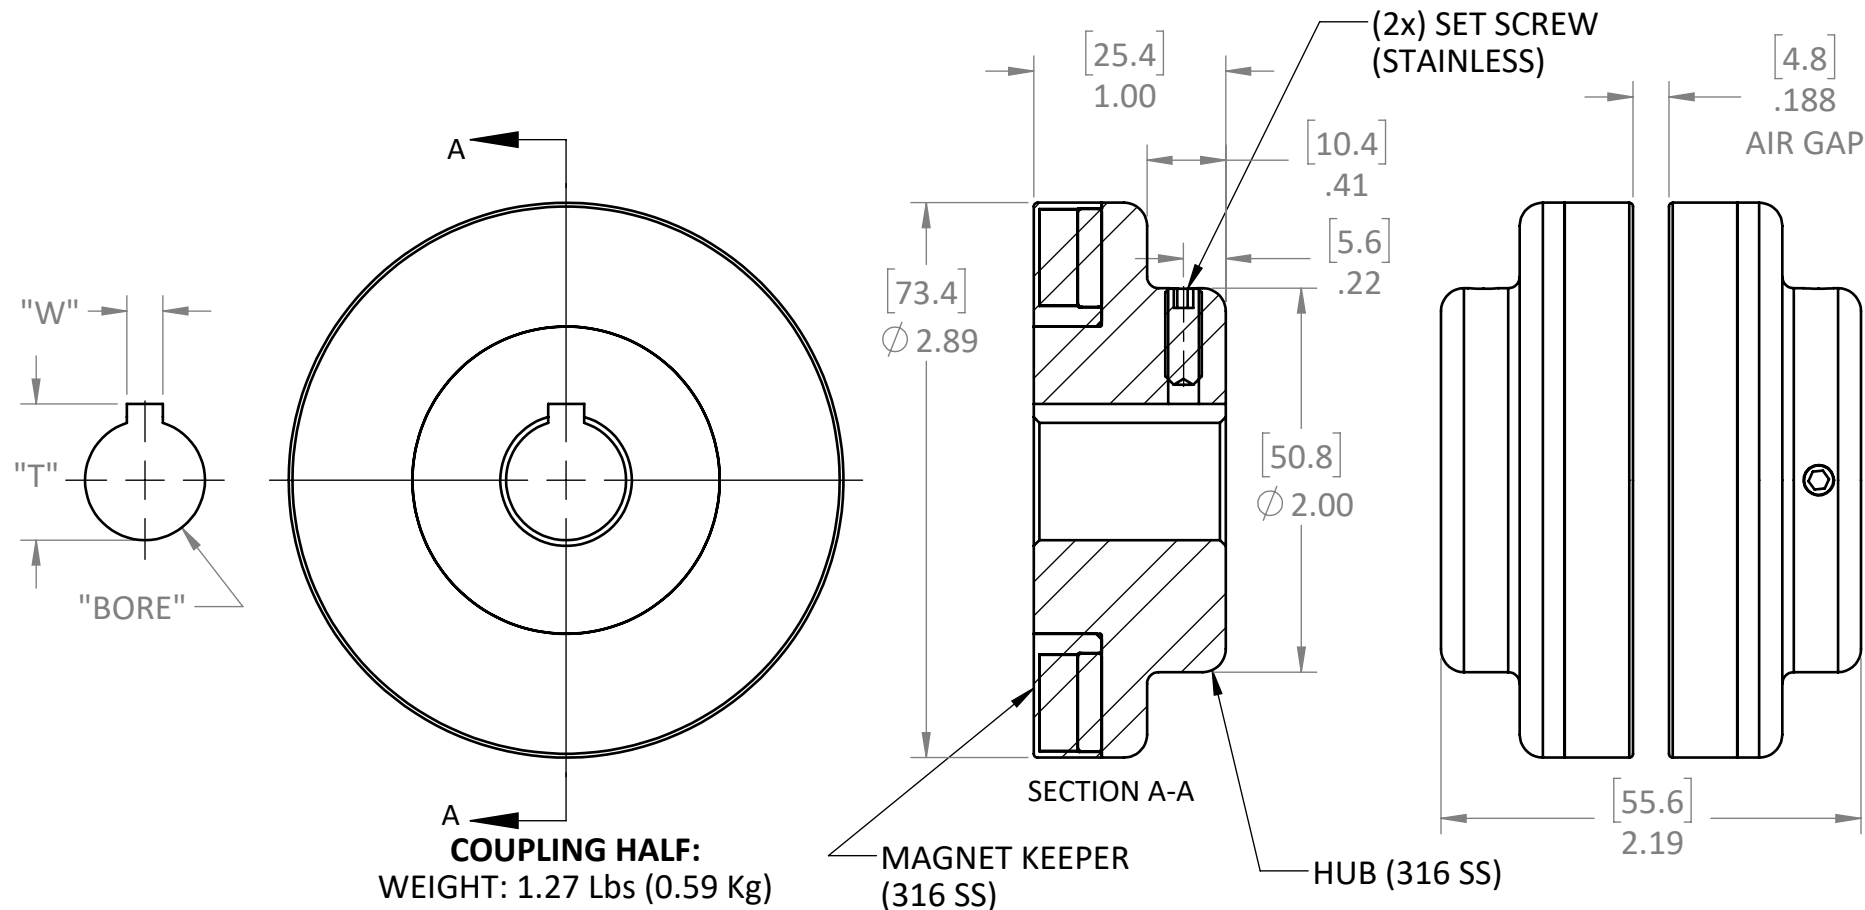

COUPLING HALF:
WEIGHT: 1.27 Lbs (0.59 Kg)

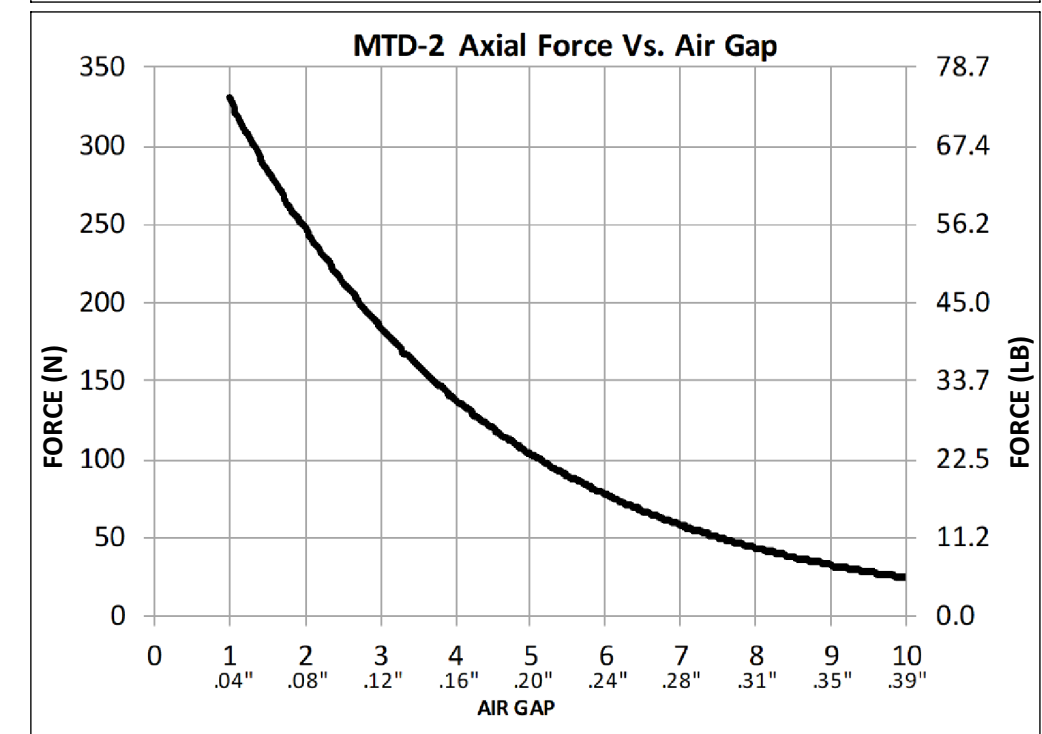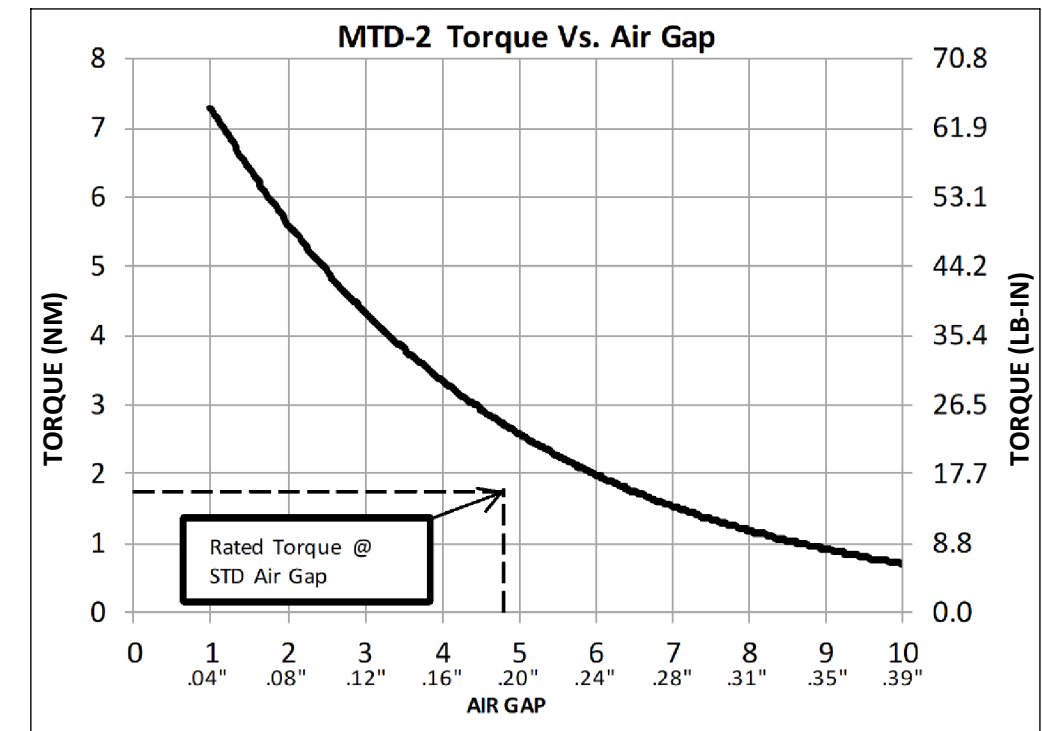

MODEL	BORE		W		T		SET SCREW (2x)
	mm ^{H8}	in ^{+0.001}	mm ^{+0.05}	in ^{+0.002}	mm ^{+0.25}	in ^{+0.010}	
MTD-2-018	8.00	.3150	-	-	-	-	M5-0.8 X 12mm
MTD-2-020	10.00	.3937	3.00	.1181	11.4	.449	M5-0.8 X 12mm
MTD-2-034	20.00	.7874	6.00	.2362	22.8	.898	M5-0.8 X 12 MM
MTD-2-038	22.00	.8661	6.00	.2362	24.8	.976	M5-0.8 X 10 MM
MTD-2-039	24.00	.9449	8.00	.315	27.3	1.075	M5-0.8 X 10 MM

OTHER SIZES AVAILABLE; SPECIFY BOTH BORE AND KEYWAY

USED ON MTD-2	SCALE 1:1	MATERIAL SEE PRT DWG	
UNLESS OTHERWISE SPECIFIED:		FINISH SEE PRT DWG	
ALL DIMENSIONS ARE IN INCHES TOLERANCES: DECIMAL: .XX ± .01 .XXX ± .005 ANGULAR: ± 1° GEN. CONCENTRICITY: .001 T.I.R. MACH. FILLETS: .010 R MACH. EDGES: .015 R OR CHMF. UNSPECIFIED RADII: .015 R IN MICROINCHES RMS 32 GEOMETRIC: TO MIL-ST'D. 8 REMOVE ALL BURRS & SHARP EDGES			43 TOWN FOREST ROAD OXFORD, MA 01540 DESCRIPTION MTD-2 (316) Cut Sheet DWG. NO. _____ REV. _____
DRAWN ASM 9/7/2022		CHECKED	SIZE: B