
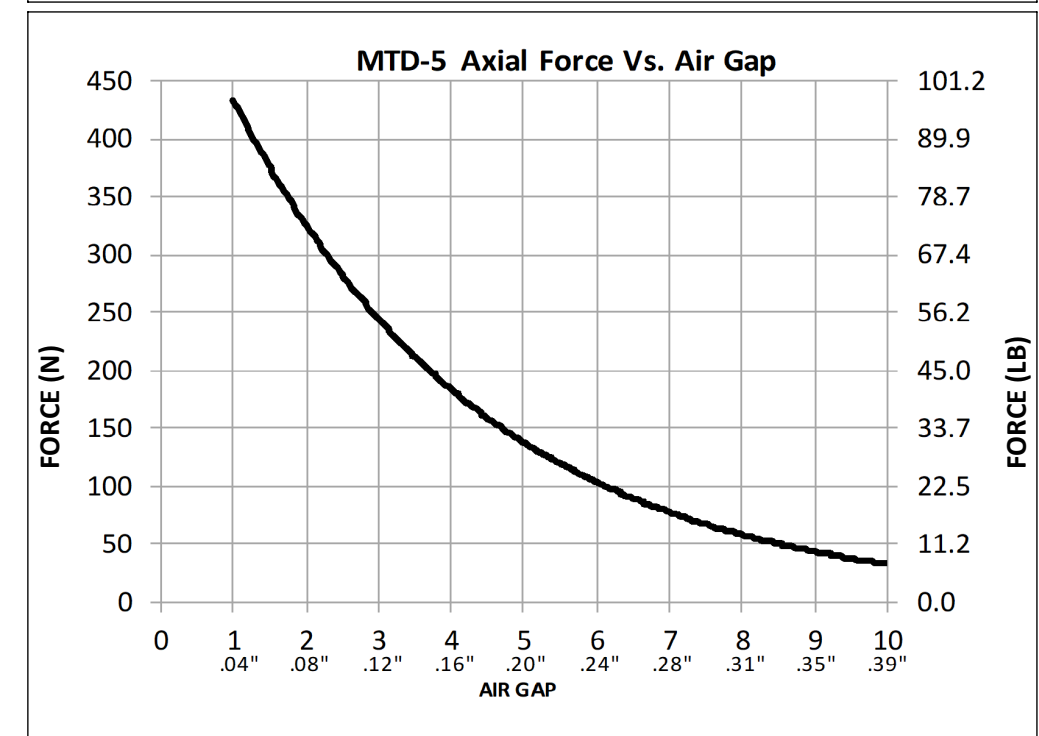
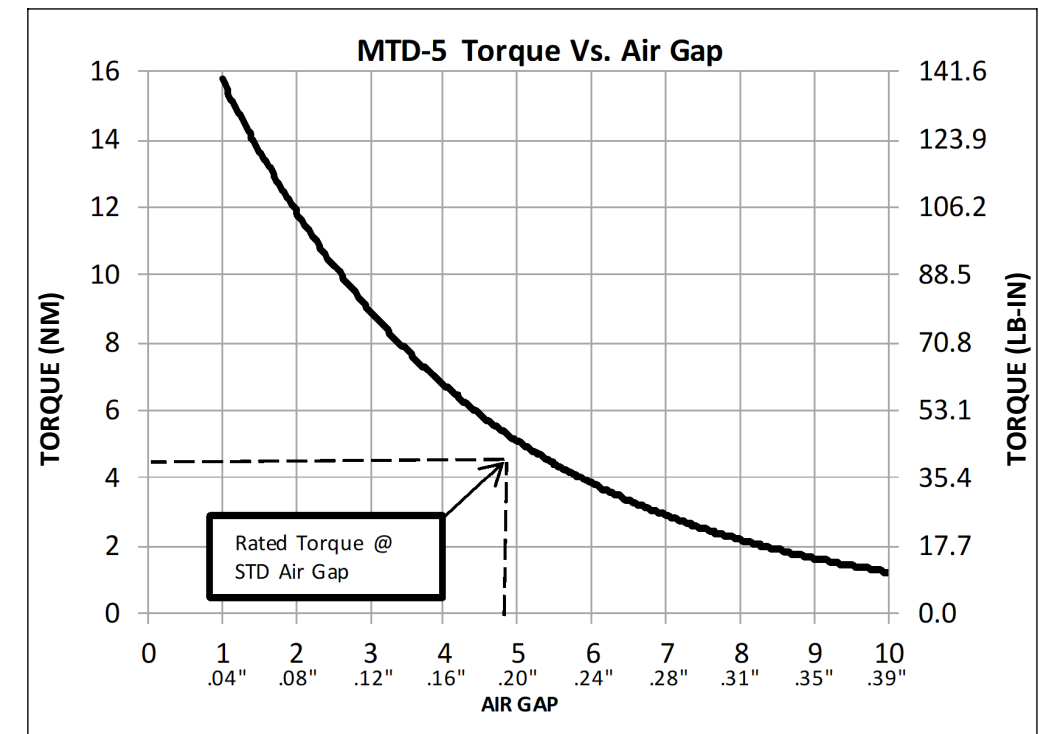


MODEL	RATED TORQUE @ STD. AIR GAP		BREAKAWAY TORQUE		MAX RPM
MTD-5	4.5 Nm	40 Lb-in	5.0 Nm	44 Lb-in	11,700*

* BALANCING FOR HIGH SPEED APPLICATIONS REQUIRED

REVISIONS			
REV.	ECN.	DESCRIPTION	DATE

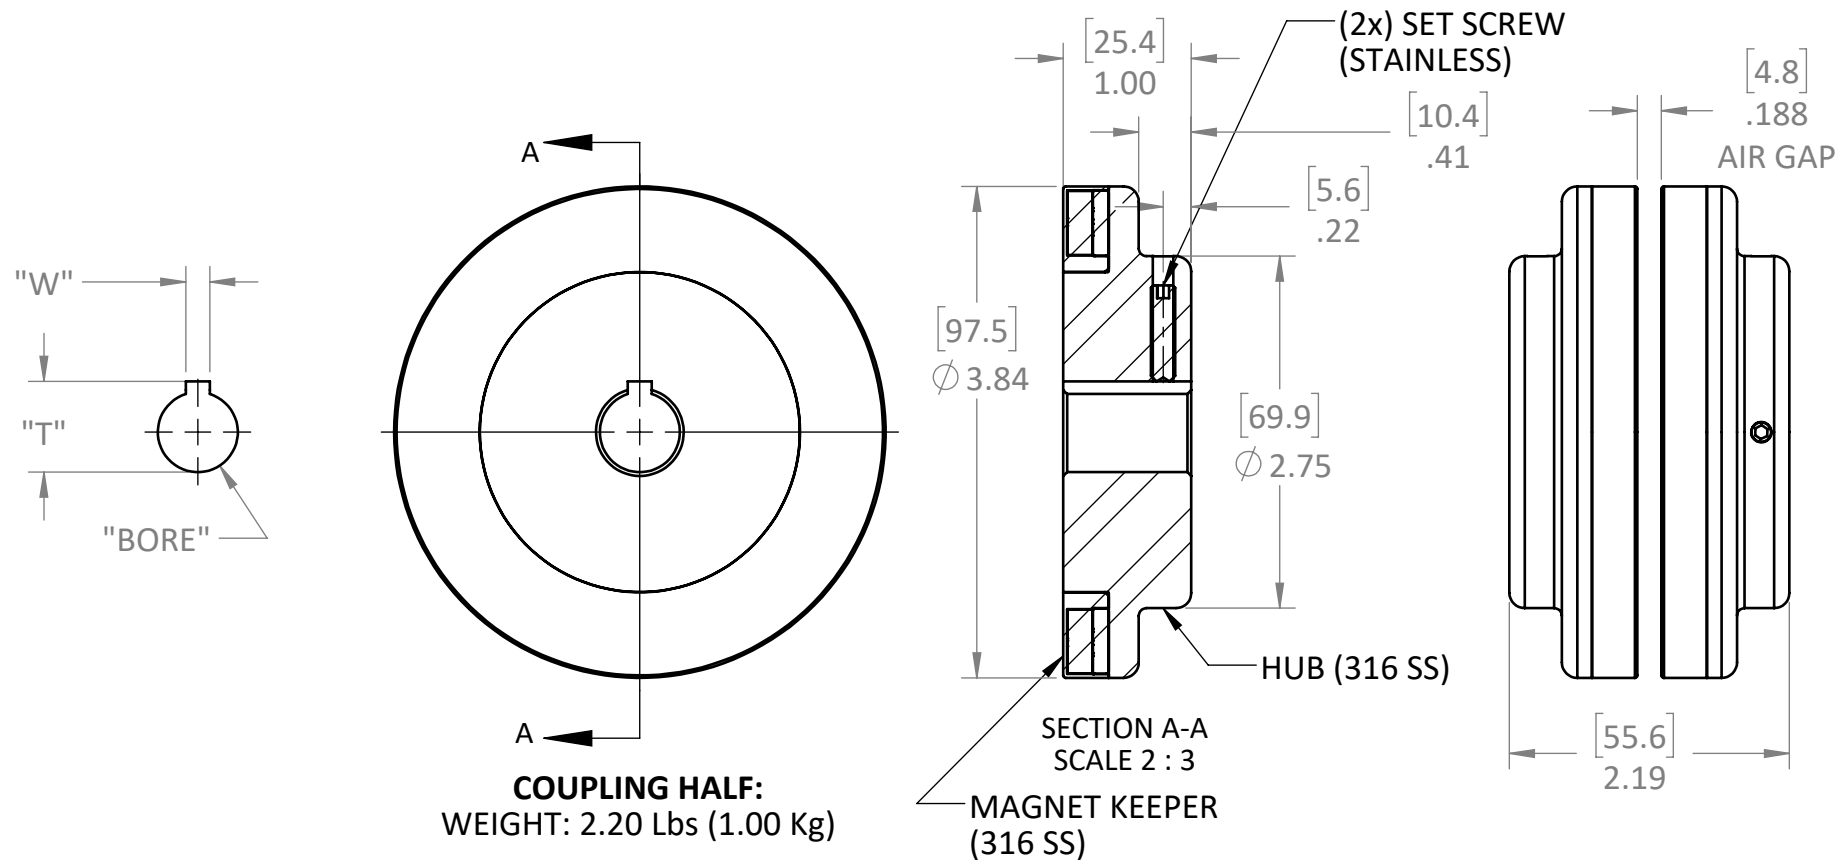

MODEL	BORE		W		T		SET SCREW (2x)
	mm ^{H8}	in ^{+0.001}	mm ^{+0.05}	in ^{+0.002}	mm ^{+0.25}	in ^{+0.010}	
MTD-5-013	SOLID		-		-		-
MTD-5-012	10.00	.3937	3.00	.1181	11.40	.449	M5-0.8 X 20mm
MTD-5-010	11.00	.433	4.00	.158	12.80	.504	M5-0.8 X 20mm

OTHER SIZES AVAILABLE; SPECIFY BOTH BORE AND KEYWAY

THIS DRAWING IS THE PROPERTY OF MAGNETIC TECHNOLOGIES LTD. AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT SHALL NOT BE LENT, COPIED, REPRODUCED NO DISCLOSED TO ANY OTHER PERSON, IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF MAGNETIC TECHNOLOGIES LTD.

USED ON MTD-5	SCALE 1:2	MATERIAL SEE PRT DWG	
UNLESS OTHERWISE SPECIFIED:			
ALL DIMENSIONS ARE IN INCHES TOLERANCES: DECIMAL: .XX ± .01 .XXX ± .005 ANGULAR: ± 1° GEN. CONCENTRICITY: .001 T.I.R. MACH. FILLETS: .010 R MACH. EDGES: .015 R OR CHMF. UNSPECIFIED RADII: .015 R IN MICROINCHES RMS 32 GEOMETRIC: TO MIL-ST'D. 8 REMOVE ALL BURRS & SHARP EDGES			FINISH SEE PRT DWG DRAWN ASM 9/8/2022 CHECKED
43 TOWN FOREST ROAD OXFORD, MA 01540 DESCRIPTION MTD-5 (316) Cut Sheet DWG. NO. _____ REV. _____ MTD-5-XXX (316)			