
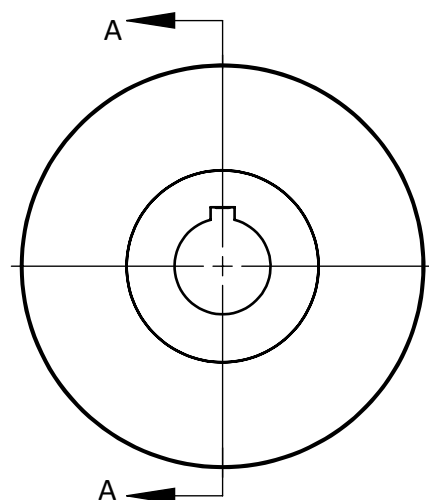





MODEL	RATED TORQUE @ STD. AIR GAP		BREAKAWAY TORQUE		MAX RPM
MTD-8	7.5 Nm	66 Lb-in	8.5 Nm	75 Lb-in	10,500*

\* BALANCING FOR HIGH SPEED APPLICATIONS REQUIRED

REVISIONS			
REV.	ECN.	DESCRIPTION	DATE



**COUPLING HALF:**  
WEIGHT: 2.55 Lbs (1.16 Kg)

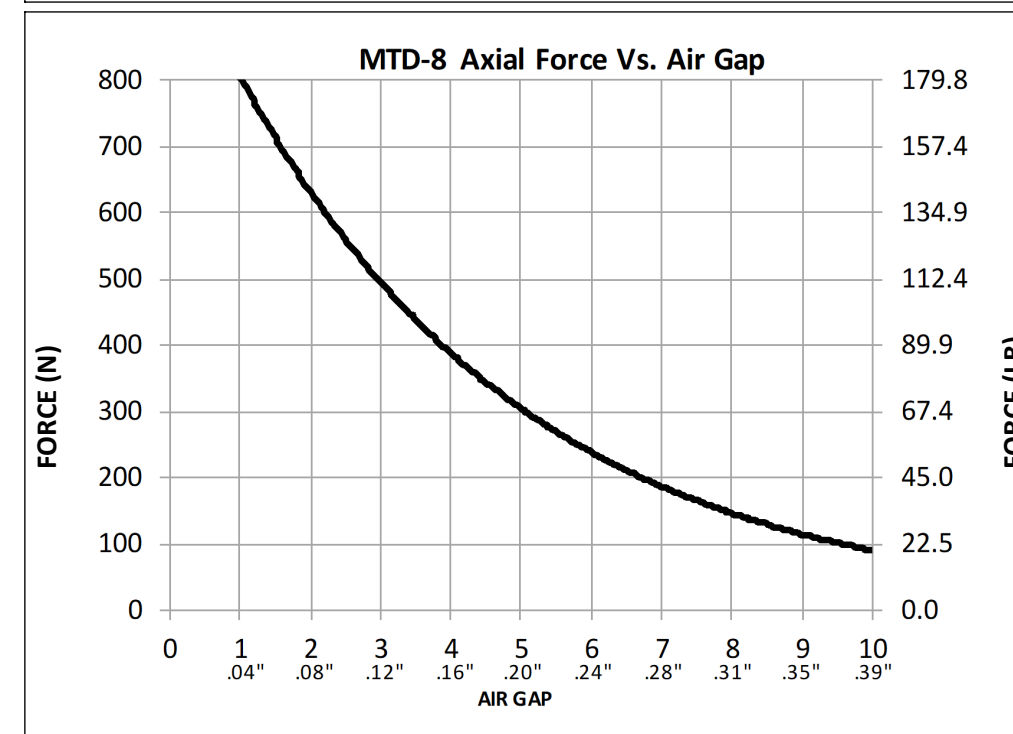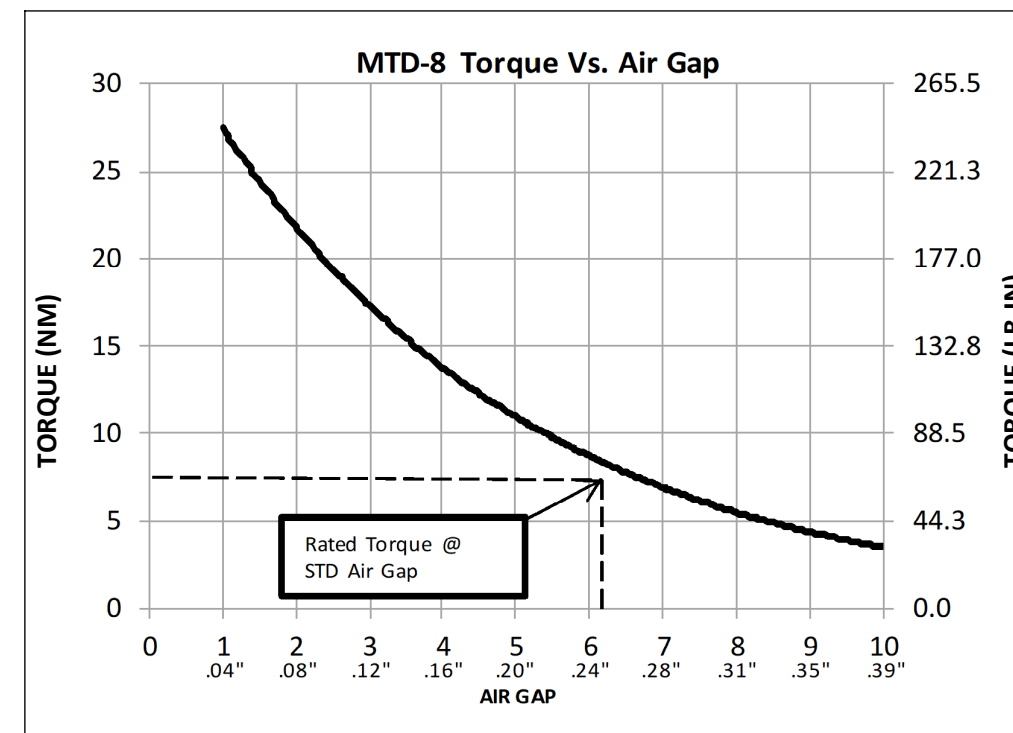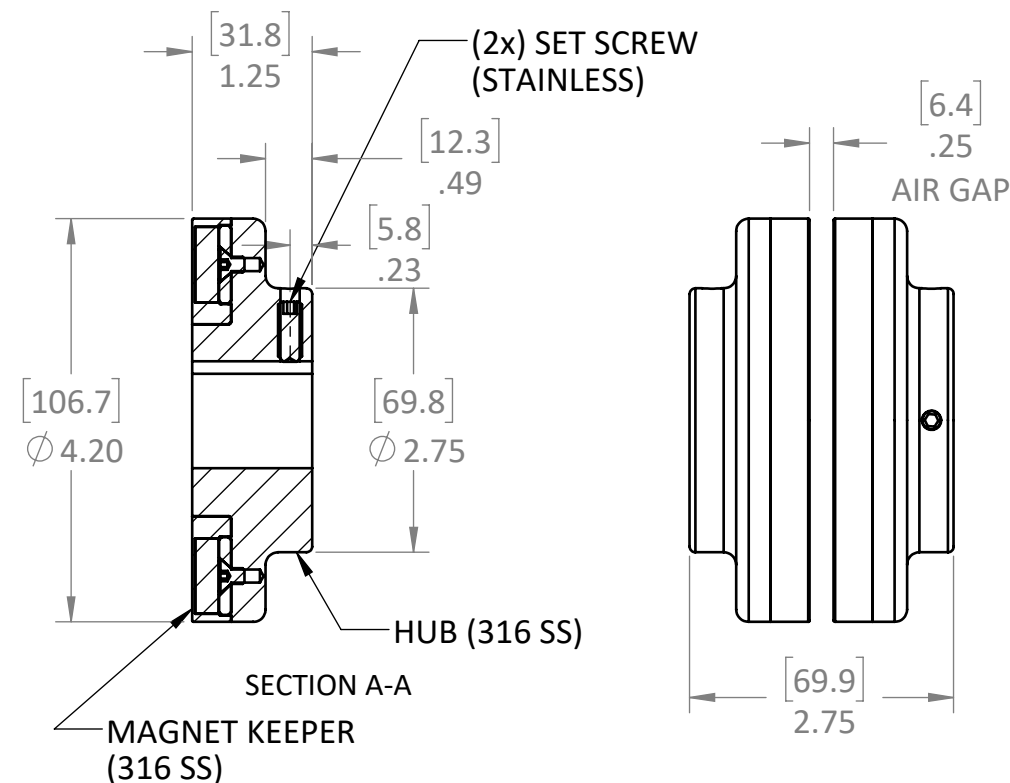

MODEL	BORE		W		T		SET SCREW (2x)
	mm <sup>H8</sup>	in <sup>+0.001</sup>	mm <sup>+0.05</sup>	in <sup>+0.002</sup>	mm <sup>+0.25</sup>	in <sup>+0.010</sup>	CUP POINT
* MTD-8-009	SOLID		-		-		-
MTD-8-010	25.40	1.000	6.35	.2500	28.30	1.114	1/4-20 x 5/8

OTHER SIZES AVAILABLE; SPECIFY BOTH BORE AND KEYWAY

**\* ONLY MTD-8-009 FROM STOCK**

THIS DRAWING IS THE PROPERTY OF MAGNETIC TECHNOLOGIES LTD. AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT SHALL NOT BE LENT, COPIED, REPRODUCED NO DISCLOSED TO ANY OTHER PERSON, IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF MAGNETIC TECHNOLOGIES LTD.

USED ON MTD-8	SCALE 1:2	MATERIAL SEE PRT DWG	<b>MAGNETIC TECHNOLOGIES LTD.</b> 43 TOWN FOREST ROAD OXFORD, MA 01540
UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES TOLERANCES: DECIMAL: .XX ± .01 .XXX ± .005 ANGULAR: ± 1° GEN. CONCENTRICITY: .001 T.I.R. MACH. FILLETS: .010 R MACH. EDGES: .015 R OR CHMF. UNSPECIFIED RADII: .015 R IN MICROINCHES RMS 32 GEOMETRIC: TO MIL-ST'D. 8 REMOVE ALL BURRS & SHARP EDGES		FINISH SEE PRT DWG	
		DRAWN ASM 9/8/2022	DESCRIPTION <b>MTD-8 (316) Cut Sheet</b>
		CHECKED	DWG. NO. _____ REV. _____
		SIZE: B	<b>MTD-8-XXX (316)</b>